



## F21 Transmitter (only) Two Speed

### Key features

- 3 Year Warranty, Customer Support and Service in the USA


F21 Transmitter (only) Two Speed

## Technical Specifications

|                                 |                                       |                                    |                                      |
|---------------------------------|---------------------------------------|------------------------------------|--------------------------------------|
| <b>FCC ID</b>                   | OFNF21                                | <b>Transmitter Power</b>           | ≤10dBm                               |
| <b>Transmitter Power Supply</b> | 2 AA batteries                        | <b>Wireless Frequency Range</b>    | VHF: 310~331 MHz; UHF: 425 ~ 446 MHz |
| <b>Material</b>                 | Glass-Fiber PA                        | <b>IEC Motor Protection</b>        | IP65                                 |
| <b>Control Distance</b>         | Approx 60m (100 meters is customized) | <b>Operating Temperature Range</b> | -40 ~ 185 °F / -40 ~ 85°C            |
| <b>Safety Code</b>              | 32 bits (4.3 billion)                 | <b>Warranty</b>                    | 3 Year                               |

## **F21-2S/2D TRANSMITTER**

Small, economical, convenient

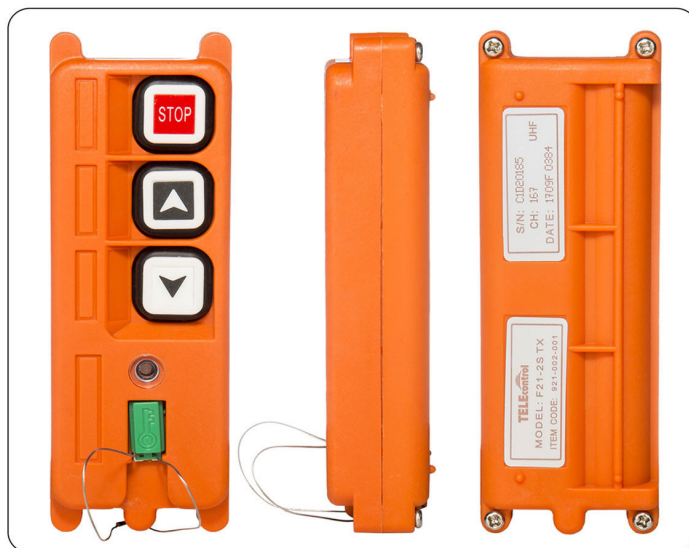

**MODEL:** F21-2S-TX  
**ITEM CODE:** 921-002-001  
**Dimensions:** 132 x 45 x 28 mm  
**Weight:** 98g (without batteries)

### Product Features:

- Two single/double speed buttons, one "STOP"
- 6 control contactors.
- With battery voltage warning device, the power supply is cut off during low power
- Safety key switch to prevent from unauthorized user.
- Program the button function by computer interface.
- Up/Down can be programmed to interlock or non-interlock.
- The spare button can be programmed to start, toggle or normal, etc.

### Standard Configuration:

- One transmitter (with hanging belt)
- One dust bag
- One receiver
- Receiver with 1.6 meter cable
- Battery: One pair
- One receiver antenna.
- Operation and maintenance manual.

### Safety features:

Each radio remote control system functions in all manner of operational conditions equipped with their own unique identity code (ID-Code). This means that only the correct control unit can activate and control its matching receiver (crane/machine) for maximum safety. The system is FCC and CE certificates.



## Unit Weight & Dimensions

|                          |              |
|--------------------------|--------------|
| <b>Total Unit Weight</b> | 1 lbs / 1 Kg |
|--------------------------|--------------|

## Packaging Weight & Dimensions

|                               |                |
|-------------------------------|----------------|
| <b>Package 1 Net Weight</b>   | 1 lbs / 0 Kg   |
| <b>Package 1 Width</b>        | 2 in / 5.08 cm |
| <b>Package 1 Gross Weight</b> | 1 lbs / 0 Kg   |
| <b>Package 1 Height</b>       | 5 in / 12.7 cm |
| <b>Package 1 Length</b>       | 2 in / 5.08 cm |