



## 660 lbs Mini Electric Chain Hoist 9 ft. Chain S3 220V Wireless

### Key features



- 1 Year Warranty, Customer Support and Service in the USA

### Electric Chain Hoist Description

660 lb Wireless Electric Chain Hoists are used for raising and lowering material. Power Cord is standard at 3 ft. for Hook and Push Trolley Mounts. Hoists usually ship within 1-3 business days after ordering. Please call us at 1 (800) 971-8061 for any special requests. The Highest Quality, most Technologically Advanced Hoist in the Industry. Our hoist ranges from basic Light Duty H1 to Heavy Duty Motor - 60 minute, H4 classification, Class B insulation with cooling fins and standard thermal motor protection. Compact lightweight body offers one of the lowest headroom hoists in the industry. Extremely durable and reliable Pull Rotor Motor Brake. Contains NO brake coil to fail like conventional disc brakes. Easy Maintenance Control Panel is hinged to swing out to provide fast, easy, and trouble-free access. Completely Sealed Body suitable for both indoor and outdoor applications, including harsh environments. Gaskets throughout the hoist provide an IP55 rating. Oil Bath and precision machined helical and spur gears provide for quiet, smooth, and cool operations. Superior Quality Chain is precision gauged, Grade 80, manganese alloy load chain that is heat treated for wear resistance and extended life.

## Technical Specifications

<b>Rated Load Capacity</b>	660 lb / 300 kg	<b>Control Voltage</b>	2 X AA Battery
<b>Standard Lifting Height</b>	10 ft / 3 m	<b>Emergency Stop</b>	Yes
<b>Speed /min</b>	10 ft / 3 m	<b>Contactors</b>	HSIN DA 20 AMP
<b>Number of Speeds</b>	1 Speed	<b>Gear Ratio</b>	119:1
<b>Voltage</b>	1 Phase 220~240V 50/60Hz	<b>Load Chain Type</b>	G80
<b>FCC ID</b>	OFNF21	<b>Load Chain Size</b>	13/64 in   5.0 mm
<b>Duty Class</b>	H1/M2/1Cm/Class A	<b>Chain Falls</b>	1
<b>Motor/Engine Power</b>	410 Watts	<b>Chain Length</b>	10 ft / 3 m
<b>Motor AMP</b>	2.09	<b>Humidity</b>	<85%
<b>Motor Brake</b>	Yes	<b>Temperature</b>	-4 ~ 104° F / -20 ~ 40° C
<b>Insulation Grade</b>	B	<b>Noise Level</b>	80 dB
<b>IEC Motor Protection</b>	IP54	<b>Warranty</b>	1 Year
<b>Control</b>	Wireless F21 / Optional Pendant Control		

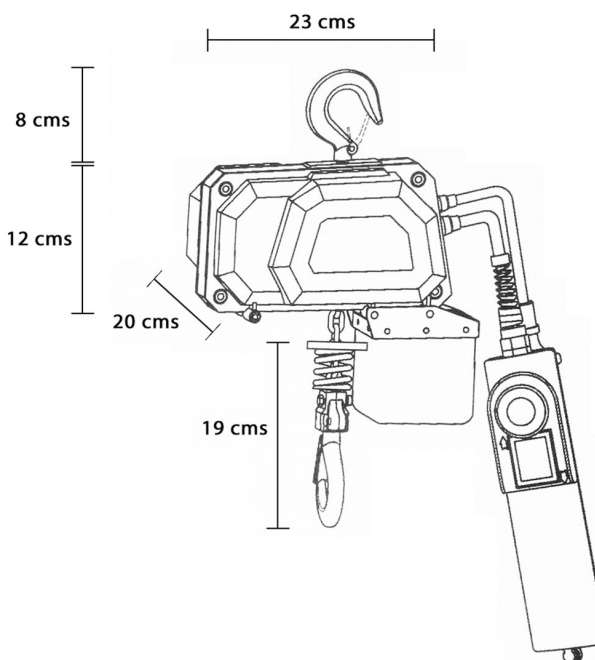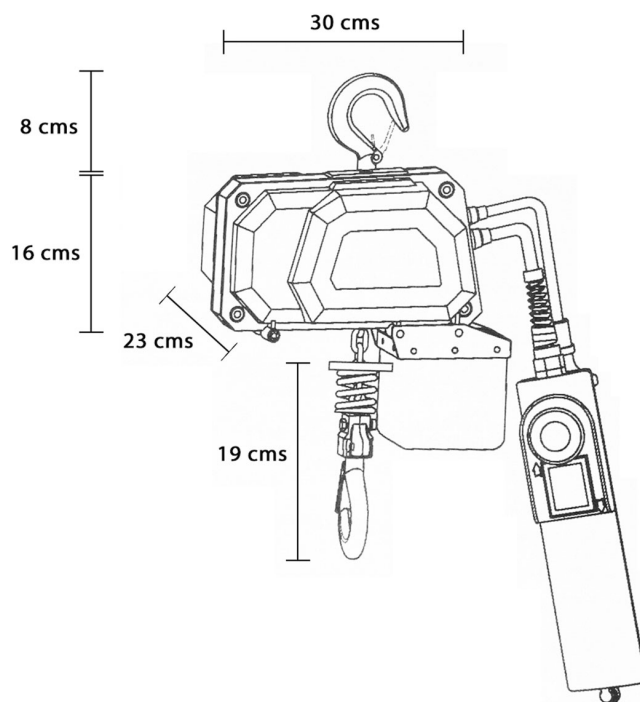

Referential Images  
Specifications may change without notice

## Unit Weight & Dimensions

<b>Total Unit Weight</b>	30 lbs / 14 Kg
--------------------------	----------------

## Packaging Weight & Dimensions

<b>Package 1 Net Weight</b>	30 lbs / 14 Kg
-----------------------------	----------------

<b>Package 1 Width</b>	5 in / 12.7 cm
------------------------	----------------

<b>Package 1 Gross Weight</b>	35 lbs / 16 Kg
-------------------------------	----------------

<b>Package 1 Height</b>	5 in / 12.7 cm
-------------------------	----------------

<b>Package 1 Length</b>	12 in / 30.48 cm
-------------------------	------------------