



660 Lb Mini Electric Chain Hoist 10 ft Chain 110V Wireless

Key features

- Features: Lifting capacity of 660 lbs (300 kg) Lifting Height 10 ft (3 meters) Speed 10 ft/min (3 m/min) 360° swivel hooks. Compact lightweight design, easy to transport, install and operate. 100 ft Control Range. Ideal for intermittent lifting jobs in Home, Garages Ceilings, Workshops, etc..
- Made to last: 5mm G80 Grade Steel Chain, Forged Hooks, Alloy Steel central block and gears, Professional Grade Wireless Remote Control with IP65 Protection for dust and water
- Safety: Automatic Brake will engage in the event of a power loss, Upper and Lower Limit switches to avoid load collisions, Safety latch on upper and lower hooks. Remote Control with Emergency Stop, On/Off Safety Key. Wireless Control allows you to stay away from the load during operation.
- We are here. US based Technical Support
- 1 Year Warranty, Customer Support and Service in the USA

Mini Electric Chain Hoist 660 lb 10 ft Chain 110V Wireless Description

The **Prowinch 660lbs Mini Electric Chain Hoist** allows you to easily lift light to medium loads. The single-phase electrical connection allows for quick and simple setup and is perfect for use in a wide variety of situations. The wireless remote offers added convenience, allowing you to operate the hoist and trolley from up to 100 feet away.

Prowinch Mini Chain Hoists

All of our electric chain hoists are created with the goal of offering the best price-performance ratio. Key components such as lifespan factors are constantly tested and improved in order to offer the best product for the price.

Key Components

All internal components have been upgraded to meet the highest quality standards. All testing is performed in the US before shipping to ensure that every unit meets the corresponding standard.

Duty Classification

Duty classification is a key factor when choosing the right unit. This H1 electric chain hoist is suitable for infrequent handling, installing and servicing heavy equipment, and idling for long periods between use. For uniformly distributed work periods, the hoist has a 12.5% max. operational time per hour and can handle up to 75 starts per hour. When being used for infrequent work periods, the hoist can be operated for 15 minutes from a cold start with up to 100 starts per hour. Operational time ratings are calculated at a 65% load factor, as per ASME Standards.

Control System


This electric chain hoist comes standard with an industrial wireless remote control, which is waterproof, shockproof, and can be operated from 100 feet away. It also features a safety key and emergency stop button.

Braking System

The electromagnetic brake system is tested at 125% of the hoist capacity and is designed to automatically engage immediately upon any loss of power.

Technical Specifications

Rated Load Capacity	660 lb / 300 kg	Control Voltage	2 X AA Battery
Standard Lifting Height	10 ft / 3 m	Emergency Stop	Yes
Speed /min	10 ft / 3 m	Contactors	HSIN DA 20 AMP
Number of Speeds	1 Speed	Gear Ratio	119:1
Voltage	1 Phase 110~120V 60Hz	Load Chain Type	G80
FCC ID	OFNF21	Load Chain Size	13/64 in 5 mm
Duty Class	H1/M2/1Cm/Class A	Chain Falls	1
Motor/Engine Power	500 Watts	Chain Length	10 ft / 3 m
Motor AMP	5.12	Humidity	<85%
Motor Brake	Yes	Temperature	-4 ~ 104° F / -20 ~ 40° C
Insulation Grade	B	Noise Level	80 dB
IEC Motor Protection	IP54	Warranty	1 Year
Control	Wireless F21 / Optional Pendant Control		

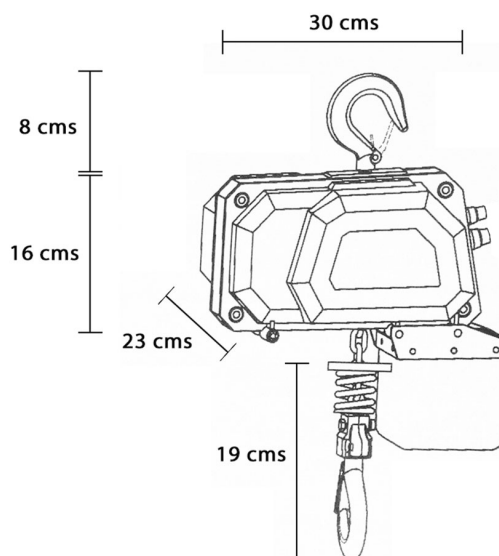

Unit Weight & Dimensions

H Minimum Headroom	14"
W Width	11"
D Depth	8 1/2"
J Hook Opening	3/4"
Total Unit Weight	28 lbs / 13 Kg

Packaging Weight & Dimensions

Package 1 Net Weight	26 lbs / 12 Kg
Package 2 Net Weight	2 lbs / 1 Kg
Package 1 Gross Weight	26 lbs / 12 Kg
Package 2 Gross Weight	1 lbs / 0 Kg
Package 1 Length	11 in / 27.94 cm
Package 2 Length	5 in / 12.7 cm
Package 1 Width	13 in / 33.02 cm
Package 2 Width	7 in / 17.78 cm
Package 1 Height	13 in / 33.02 cm
Package 2 Height	9 in / 22.86 cm