

30 Ton Electric Winch 440~480V

Key features







- Double Brake for Added Safety. Reducer brake and Motor Brake are Standard.
- Low Voltage IP66 Remote Control with Emergency Stop.
- Complete Line of Optional Accessories such as Drivers, Wireless and Desk Controls, and More.
- US ASME B30.7 and EC EN14492-2 , EN60204-32 Standard
- 3 Year Warranty, Customer Support and Service in the USA

Compact Winch Description

The **Prowinch 66138 lbs compact winch** is a powerful heavy-duty winch. The strong motor and three-phase connection are perfect for use in mining, logging, or manufacturing. There are a variety of optional add-ons available for a more customized experience.

Technical Specifications

1st Layer Rated Capacity	66138 lb / 30000 kg	Control	E-Stop/Up/Down - Optional Variable Speed
Speed /min	21.3 ft ~37.8 ft / 6.5~11.5 m	Reducer Brake	1 @125%
Number of Speeds	1 Speed - Optional Variable Speed	Drum Brake	Optional
Voltage	3 Phase 380/440~480V 50/60Hz	Wire Rope	Not Included
Duty Class	H4/M6/3m/Class D	Recommended Wire Rope	ø1 1 /4 in x 88.5 ft ø31.7 mm x 30 m
Motor/Engine Power	30 kW / 40 HP	Humidity	<85%
Motor Brake	1 @125%	Temperature	-4 ~ 104° F / -20 ~ 40° C
Insulation Grade	F	Noise Level	85 db
IEC Motor Protection	IP54	Standards Compliance	ASME/ANSI B30.7, B30.10 / AWS D14.3 / RR-W-410E / ISO 2232
Dynamic Brake	Optional	Warranty	3 Year

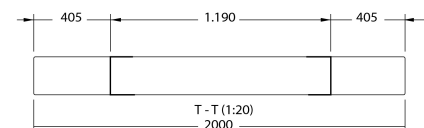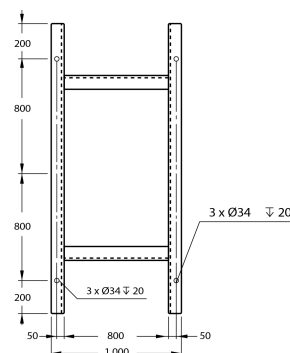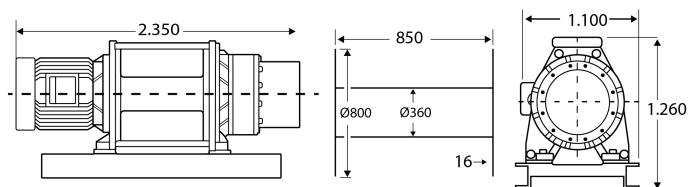

Unit Weight & Dimensions

A Total Height	1260 mm
BD Barrel Diameter	ø360 mm
D Depth	1100 mm
FD Flange Diameter	ø800 mm
W Width	2350 mm
DL Drum Length	850 mm