



990 lbs. Electric Winch Wire Rope 220/240V

Key features

- 3 Year Warranty, Customer Support and Service in the USA

990 lbs. Electric Winch Wire Rope 220/240V

Prowinch Light Duty Single Phase Industrial Winch

Our industrial winches are designed to achieve the best price, quality and performance ratio, backed by a 3-year warranty. The key components of the equipment are constantly tested and improved through our internal design processes, based on continuous improvement, under ISO9001: 2015 certification.

Security

Automatic electromagnetic release brake with a capacity greater than 125% of the Nominal Capacity and designed to brake immediately upon any loss of energy. Safety hook with protection latch.

Performance and Quality

Strong, safe and reliable structure with IP55 degree of protection.

Components


Assembled in Taiwan / RPC with the best Components that guarantee optimal equipment operation. Optional: Variable Speed Drive, Remote Control and Pulleys.

Customizable

Standard configuration 220 / 240V - 50 / 60Hz. Voltage and Cable Length change options available.

Technical Specifications

| | | | |
|---------------------------------|--------------------------|-----------------------------|--|
| 1st Layer Rated Capacity | 992 lb / 450 kg | IEC Motor Protection | IP55 |
| Speed /min | 72~121 ft / 22~37 m | Wire Rope | ø17/64 in x 98 ft ø6.8 mm x 30 m |
| Number of Speeds | 1 Speed | Standards Compliance | D14.3 / RR-W-410E / ISO2232 / ASME B30.7 / B30.10 / ANSI-AWS |
| Voltage | 1 Phase 220~240V 50/60Hz | Warranty | 3 Year |
| Motor/Engine Power | 1.49 kW / 2 HP | | |

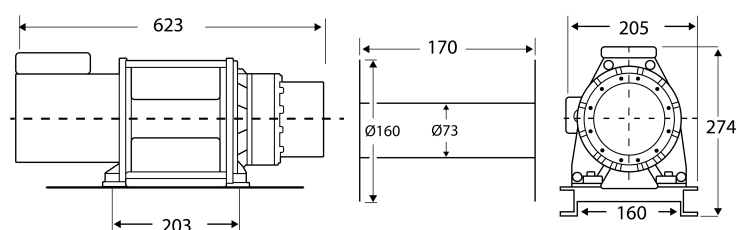

Dimensions in mm / Dimensiones en mm

| Layer / Capa | Rope on drum / Mts x Capa | Lifting x layer / Cap x Capa | Speed / Velocidad (per min) |
|--------------|---------------------------|------------------------------|-----------------------------|
| 1 | 19 ft / 6 m | 992 lb / 450 kg | 57.0 ft / 17.4 m |
| 2 | 41 ft / 12 m | 852 lb / 386 kg | 66.3 ft / 20.2 m |
| 3 | 66 ft / 20 m | 747 lb / 339 kg | 75.7 ft / 23.1 m |
| 4 | 94 ft / 29 m | 665 lb / 301 kg | 85.0 ft / 25.9 m |
| 5 | 125 ft / 38 m | 599 lb / 272 kg | 94.4 ft / 28.8 m |

INCLUDED/INCLUIDO

Unit Weight & Dimensions

| | | | |
|---------------------------|-----------------|-------------------------------|------------------|
| A Total Height | 277 mm | Package 1 Net Weight | 110 lbs / 50 Kg |
| BD Barrel Diameter | ø73 mm | Package 1 Width | 15 in / 38.1 cm |
| D Depth | 210 mm | Package 1 Gross Weight | 116 lbs / 53 Kg |
| FD Flange Diameter | ø160 mm | Package 1 Height | 16 in / 40.64 cm |
| W Width | 627 mm | Package 1 Length | 30 in / 76.2 cm |
| DL Drum Length | 170 mm | | |
| Total Unit Weight | 110 lbs / 50 Kg | | |

Packaging Weight & Dimensions