



## 1 Ton Electric Chain Hoist 20 ft. FEC G80 Japan Chain M5/H4 208~240/440~480V Wireless

### Key features



- UL Certification, US and EU Standards ASME HST-1 , ASME B30.16 , EN14492-2 , EN60204-32
- German Brand Schneider Contactors, All ways Limit Switches, Emergency Stop
- Overload Protection and Super Heavy Duty FEC G80 Chain, MADE IN JAPAN. Standard ASTM A973
- Quality is inside: Heavy Duty H4/M5, Aluminum Housing, NSK Bearings, USA Chevron Meropa 320 Lube
- 3 Year Warranty, Customer Support and Service in the USA

### Electric Chain Hoist Description

This **Wireless 1 Speed 1 ton Electric Chain Hoist** has a 20 foot lifting height and uses a powerful motor to raise and lower heavy loads. The three-phase power supply and quick-connect electrical wiring system make it ideal for commercial or home applications.

## Technical Specifications

|                                |                                    |                             |  |
|--------------------------------|------------------------------------|-----------------------------|--|
| <b>Rated Load Capacity</b>     | 2200 lbs / 1000 kg                 | <b>Emergency Stop</b>       | Yes  |
| <b>Standard Lifting Height</b> | 20 ft / 6 m                        | <b>Load Chain Type</b>      | G80 JAPAN                                      |
| <b>Number of Speeds</b>        | 1 Speed                            | <b>Load Chain Size</b>      | 8x24mm   |
| <b>Voltage</b>                 | 3 Phase 208~240/440~480V 50/60Hz   | <b>Chain Falls</b>          | 1  |
| <b>FCC ID</b>                  | 2AZMK-Q1212                        | <b>Chain Length</b>         | 20 ft / 6 m                                    |
| <b>Duty Class</b>              | H4/M5/2m/Class D                   | <b>Humidity</b>             | <85%   |
| <b>Motor/Engine Power</b>      | 1.6 KW                             | <b>Temperature</b>          | -4 ~ 104° F / -20 ~ 40° C                      |
| <b>Motor Brake</b>             | Yes                                | <b>Noise Level</b>          | 81 dB  |
| <b>Insulation Grade</b>        | F                                  | <b>Standards Compliance</b> | UL 1340 - ASME HST-1 , ASME B30.16, EN60204-32 |
| <b>IEC Motor Protection</b>    | IP55                               | <b>UL File</b>              | MSXT.E528915 - Hoists                          |
| <b>Control</b>                 | Wireless F21-4 and Pendant Control | <b>Warranty</b>             | 3 Year   |
| <b>Control Voltage</b>         | 12V                                |                             |  |

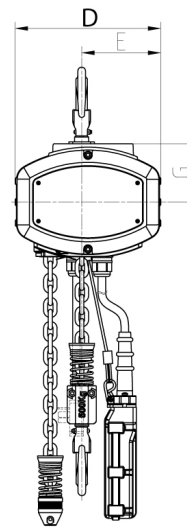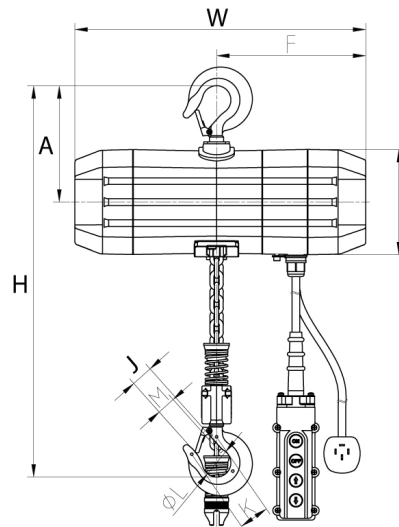

## Unit Weight & Dimensions

|                          |                   |                               |                  |
|--------------------------|-------------------|-------------------------------|------------------|
| <b>W Width</b>           | 19.5 in / 49.3 cm | <b>Package 1 Net Weight</b>   | 153 lbs / 69 Kg  |
| <b>J Hook Opening</b>    | 1.22 in / 3.1 cm  | <b>Package 1 Width</b>        | 22 in / 55.88 cm |
| <b>Total Unit Weight</b> | 153 lbs / 70 Kg   | <b>Package 1 Gross Weight</b> | 192 lbs / 87 Kg  |
|                          |                   | <b>Package 1 Height</b>       | 20 in / 50.8 cm  |
|                          |                   | <b>Package 1 Length</b>       | 25 in / 63.5 cm  |

## Packaging Weight & Dimensions