



2 Speed 1 Ton Electric Chain Hoist 20 ft. FEC G80 Japan Chain M5/H4 208~240/440~480V Wireless

Key features



- UL Certification, US and EU Standards ASME HST-1 , ASME B30.16 , EN14492-2 , EN60204-32
- German Brand Schneider Contactors, All ways Limit Switches, Emergency Stop
- Overload Protection and Super Heavy Duty FEC G80 Chain, MADE IN JAPAN. Standard ASTM A973
- Quality is inside: Heavy Duty H4/M5, Aluminum Housing, NSK Bearings, USA Chevron Meropa 320 Lube
- 3 Year Warranty, Customer Support and Service in the USA

Electric Chain Hoist Description

This **Wireless 2 Speed 1 ton Electric Chain Hoist** has a 20 foot lifting height and uses a powerful motor to raise and lower heavy loads. The three-phase power supply and quick-connect electrical wiring system make it ideal for commercial or home applications.

Technical Specifications

Rated Load Capacity	2200 lbs / 1000 kg	Control Voltage	12V
Standard Lifting Height	20 ft / 6 m	Emergency Stop	Yes
Speed /min	1.6 / 5 min/m	Load Chain Type	G80 JAPAN
Number of Speeds	2 Speed	Load Chain Size	8x24mm
Voltage	3 Phase 208~240/440~480V 50/60Hz	Chain Falls	1
Total Power Watts	1600	Chain Length	20 ft / 6 m
FCC ID	2AZMK-Q1212	Humidity	<85%
Duty Class	H4/M5/2m/Class D	Temperature	-4 ~ 104° F / -20 ~ 40° C
Motor/Engine Power	1.6 KW	Noise Level	81 dB
Motor Brake	Yes	Standards Compliance	UL 1340 - ASME HST-1 , ASME B30.16, EN60204-32
Insulation Grade	F	UL File	MSXT.E528915 - Hoists
IEC Motor Protection	IP55	Warranty	3 Year
Control	Wireless F21-4 and Pendant Control		

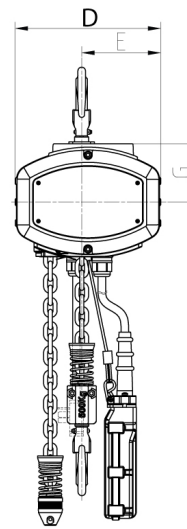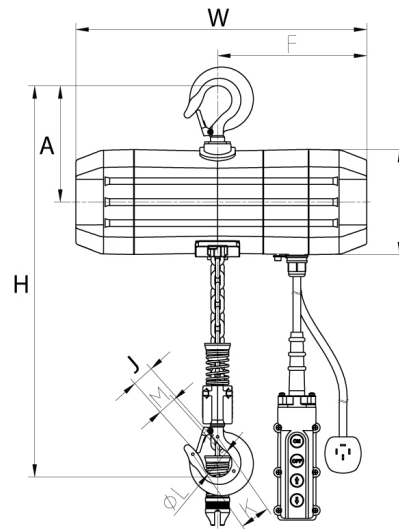

Unit Weight & Dimensions

H Minimum Headroom	21.5 in / 54.5 cm
W Width	19.5 in / 49.3 cm
D Depth	11.6 in / 29.4 cm
J Hook Opening	1.22 in / 3.1 cm
Total Unit Weight	153 lbs / 70 Kg

Packaging Weight & Dimensions

Package 1 Net Weight	153 lbs / 69 Kg
Package 1 Width	22 in / 55.88 cm
Package 1 Gross Weight	192 lbs / 87 Kg
Package 1 Height	20 in / 50.8 cm
Package 1 Length	25 in / 63.5 cm