



## 3 Ton Electric Chain Hoist 30 ft. FEC G80 Japan Chain M5/H4 208~240/440~480V Wireless

### Key features



- UL Certification, US and EU Standards ASME HST-1 , ASME B30.16 , EN14492-2 , EN60204-32
- German Brand Schneider Contactors, All ways Limit Switches, Emergency Stop
- Overload Protection and Super Heavy Duty FEC G80 Chain, MADE IN JAPAN. Standard ASTM A973
- Quality is inside: Heavy Duty H4/M5, Aluminum Housing, NSK Bearings, USA Chevron Meropa 320 Lube
- 3 Year Warranty, Customer Support and Service in the USA

### Electric Chain Hoist Description

This **Wireless 1 Speed 3 ton Electric Chain Hoist** uses a powerful motor to raise and lower loads up to 30 feet in the air. The three-phase power supply makes it ideal for commercial applications. The hoist is easy to use which helps you complete large projects with less effort.

## Technical Specifications

<b>Rated Load Capacity</b>	6600 lbs / 3000 kg	<b>Emergency Stop</b>	Yes
<b>Standard Lifting Height</b>	30 ft / 9 m	<b>Load Chain Type</b>	G80 JAPAN
<b>Number of Speeds</b>	1 Speed	<b>Load Chain Size</b>	11.2x34mm
<b>Voltage</b>	3 Phase 208~240/440~480V 50/60Hz	<b>Chain Falls</b>	1
<b>FCC ID</b>	2AZMK-Q1212	<b>Chain Length</b>	30 ft / 9 m
<b>Duty Class</b>	H4/M5/2m/Class D	<b>Humidity</b>	<85%
<b>Motor/Engine Power</b>	3 KW	<b>Temperature</b>	-4 ~ 104° F / -20 ~ 40° C
<b>Motor Brake</b>	Yes	<b>Noise Level</b>	81 dB
<b>Insulation Grade</b>	F	<b>Standards Compliance</b>	UL 1340 - ASME HST-1 , ASME B30.16, EN60204-32
<b>IEC Motor Protection</b>	IP55	<b>UL File</b>	MSXT.E528915 - Hoists
<b>Control</b>	Wireless F21-4 and Pendant Control	<b>Warranty</b>	3 Year
<b>Control Voltage</b>	12V		

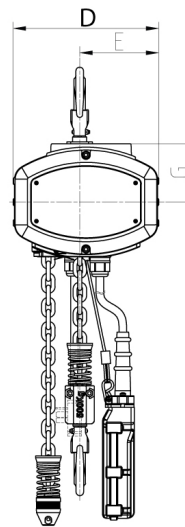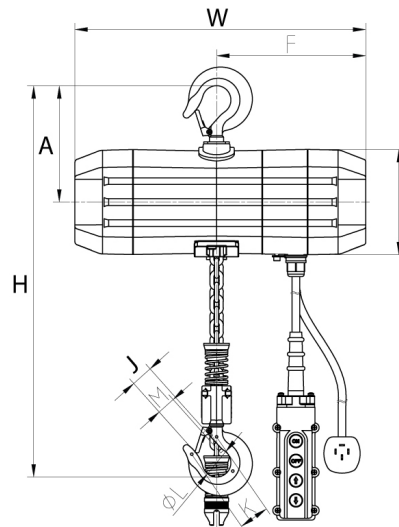

## Unit Weight & Dimensions

<b>W Width</b>	27.5 in / 69.4 cm
<b>J Hook Opening</b>	1.53 in / 3.9 cm
<b>Total Unit Weight</b>	273 lbs / 124 Kg

## Packaging Weight & Dimensions

<b>Package 1 Net Weight</b>	273 lbs / 124 Kg
-----------------------------	------------------