



2 Speed 3 Ton Electric Chain Hoist 30 ft. FEC G80 Japan Chain M5/H4 208~240/440~480V Wireless

Key features



- UL Certification, US and EU Standards ASME HST-1 , ASME B30.16 , EN14492-2 , EN60204-32
- German Brand Schneider Contactors, All ways Limit Switches, Emergency Stop
- Overload Protection and Super Heavy Duty FEC G80 Chain, MADE IN JAPAN. Standard ASTM A973
- Quality is inside: Heavy Duty H4/M5, Aluminum Housing, NSK Bearings, USA Chevron Meropa 320 Lube
- 3 Year Warranty, Customer Support and Service in the USA

Electric Chain Hoist Description

This **Wireless 2 Speed 3 ton Electric Chain Hoist** uses a powerful motor to raise and lower loads up to 30 feet in the air. The three-phase power supply makes it ideal for commercial applications. The hoist is easy to use which helps you complete large projects with less effort.

Technical Specifications

Rated Load Capacity	6600 lbs / 3000 kg	Control Voltage	12V
Standard Lifting Height	30 ft / 9 m	Emergency Stop	Yes
Speed /min	2.0 / 6.0 min/m	Load Chain Type	G80 JAPAN
Number of Speeds	2 Speed	Load Chain Size	11.2x34mm
Voltage	3 Phase 208~240/440~480V 50/60Hz	Chain Falls	1
Total Power Watts	3000	Chain Length	30 ft / 9 m
FCC ID	2AZMK-Q1212	Humidity	<85%
Duty Class	H4/M5/2m/Class D	Temperature	-4 ~ 104° F / -20 ~ 40° C
Motor/Engine Power	3 KW	Noise Level	81 dB
Motor Brake	Yes	Standards Compliance	UL 1340 - ASME HST-1 , ASME B30.16, EN60204-32
Insulation Grade	F	UL File	MSXT.E528915 - Hoists
IEC Motor Protection	IP55	Warranty	3 Year
Control	Wireless F21-4 and Pendant Control		

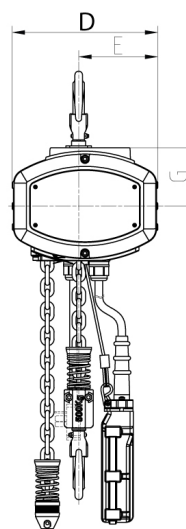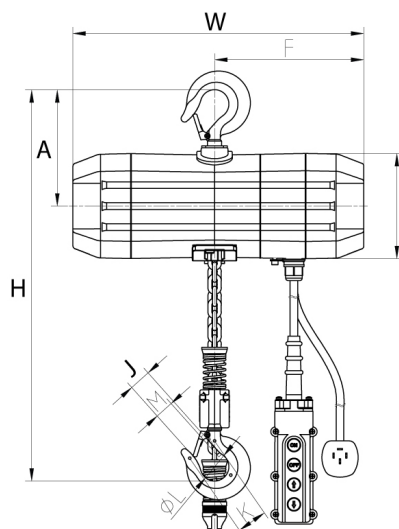

Unit Weight & Dimensions

H Minimum Headroom	23 in / 57.5 cm
W Width	27.5 in / 69.4 cm
D Depth	14 in / 35 cm
J Hook Opening	1.53 in / 3.9 cm
Total Unit Weight	273 lbs / 124 Kg

Packaging Weight & Dimensions

Package 1 Net Weight	273 lbs / 124 Kg
-----------------------------	------------------