



1 Ton Electric Chain Hoist Power Trolley 20 ft FEC G80 Japan Chain M5/H4 3 Phase Wireless



Key features

- UL 1340 File No E528915, ASME HST-1 , ASME B30.16 , EN14492-2 , EN60204-32
- Heavy Duty H4/M5 Aluminum housing, NSK Bearings, USA Chevron Meropa 320 Lube
- Overload Protection and Super Heavy Duty FEC G80 Chain, MADE IN JAPAN. Standard ASTM A973
- German Brand Schneider Contactors, All ways Limit Switches, Emergency Stop
- 3 Year Warranty, Customer Support and Service in the USA

1 Ton Electric Chain Hoist Power Trolley 20 ft FEC G80 Japan Chain M5/H4 3 Phase Wireless

Technical Specifications

Rated Load Capacity	2200 lbs / 1000 kg	Emergency Stop	Yes
Standard Lifting Height	20 ft / 6 m	Load Chain Type	G80 JAPAN
Number of Speeds	1 Speed	Load Chain Size	8 x 24 mm
Voltage	3 Phase 208~240/440~480V 50/60Hz	Chain Falls	1
FCC ID	2AZMK-Q1212	Chain Length	20 ft / 6 m
Duty Class	H4/M5/2m/Class D	Humidity	<85%
Motor/Engine Power	1.6 kW	Temperature	-4 ~ 104° F / -20 ~ 40° C
Motor Brake	Yes	Noise Level	81 dB
Insulation Grade	F	I-Beam Width Range	5 - 7 inches
IEC Motor Protection	IP55	Standards Compliance	UL 1340, ASME HST-1 , ASME B30.16 , B30.17, EN60204-32
Control	Wireless PW-Q400 and Pendant Control	UL File	MSXT.E528915 - Hoists
Control Voltage	24V	Warranty	3 Year

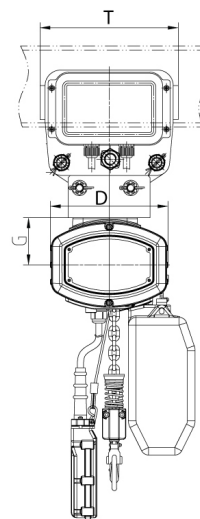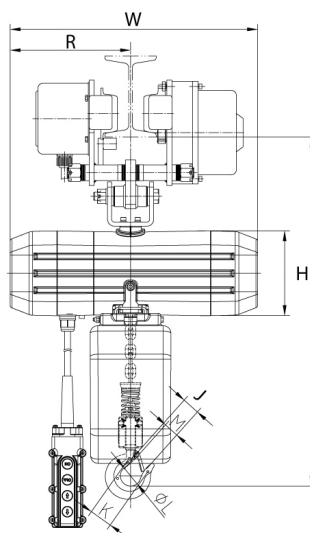

Unit Weight & Dimensions

T Trolley Motor Width	6.7 in / 17.1 cm
W Width	19.5 in / 49.3 cm
H Minimum Headroom	21.5 in / 54.5 cm
J Hook Opening	1.22 in / 3.1 cm
D Depth	11.6 in / 29.4 cm
Total Unit Weight	150 lbs / 69 Kg

Packaging Weight & Dimensions

Package 1 Net Weight	150 lbs / 68 Kg
Package 1 Width	22 in / 55.88 cm
Package 1 Gross Weight	150 lbs / 68 Kg