



660 lbs Electric Compact Industrial Winch Wire Rope 110/120V Single Phase

Key features

- Sturdy 600lb 1st Layer Load Capacity.
- Convenient wired remote control.
- Low noise, high driving efficiency and good performance
- Equipped with an electromagnetic brake.
- 1 Year Warranty, Customer Support and Service in the USA

Compact Winch Description

The **Prowinch 660 lbs compact winch** is a dependable solution for a wide variety of industries. There are a variety of optional add-ons available for a more customized experience. This winch is an excellent choice for a variety of industries such as ATV recovery, logging, and manufacturing.

Technical Specifications

1st Layer Rated Capacity	661 lb / 300 kg	Dynamic Brake	NO
Speed /min	36~49 ft / 11~15 m	Control	Wired remote control
Number of Speeds	1 Speed	Control Voltage	110V
Voltage	1 Phase 110~120V 60Hz	Transmission / Reducer Type	Planetary Reducer
Duty Class	H2/M3/1Bm/Class B	Reducer Brake	Electromagnetic
Motor/Engine Type	Electric AC	Drum Brake	NO
Motor/Engine Power	1.1 KW	Wire Rope	ø7 x 98 ft / ø7 x 30 m (drum cable capacity)
Motor Brake	NO	Standards Compliance	ASME B30.7
Insulation Grade	B	Warranty	1 Year
IEC Motor Protection	IP55		

RR-W-410E 7 /6x19/6x26 EIPS Fiber Core/ Alma de Fibra

Rope Diameter / Diámetro del Cable: 1/4 in | 6.3 mm

Nominal Strength / Resistencia Nominal: 6019 lb / 2730 kg


Rope Weight x ft / Peso del cable x m: 0.10 lb / 0.1 kg

INCLUDED / INCLUIDO

Layer / Capa	Rope on drum / Mts x Capa	Lifting x layer / Cap x Capa	Speed / Velocidad (per min)
1	21 ft / 7 m	661 lb / 300 kg	38.3 ft / 11.7 m
2	45 ft / 14 m	591 lb / 268 kg	42.8 ft / 13.0 m
3	72 ft / 22 m	535 lb / 243 kg	47.3 ft / 14.4 m
4	101 ft / 31 m	488 lb / 221 kg	51.8 ft / 15.8 m



Service/Servicio	Load/Carga	Time/Tiempo	Maintenance/ Mantenimiento
Normal	< 65%	< 25%	6~12 (months/meses)
Heavy/Pesado	> 65%	> 25%	3~6 (months/meses)
Severe/Severo	Abnormal Conditions En Condiciones Anormales Environmental, Geographical & Risky Ambientales, Geograficas & Riesgosas		1~3
	<100%	<Duty cycle limit <Limite ciclo de trabajo	

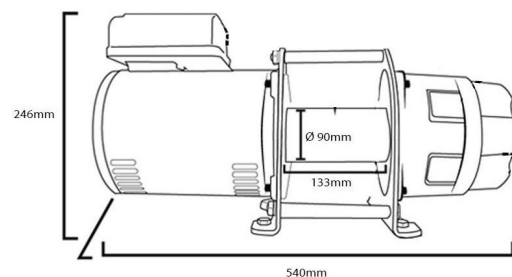

Referential Images
Specifications may change without notice

Unit Weight & Dimensions

A Total Height	246 mm	Package 1 Net Weight	108 lbs / 49 Kg
FD Flange Diameter	ø7 mm	Package 1 Width	25 in / 63.5 cm
W Width	540 mm	Package 1 Gross Weight	112 lbs / 51 Kg

Packaging Weight & Dimensions

DL Drum Length	124 mm	Package 1 Height	12 in / 30.48 cm
BD Barrel Diameter	ø90 mm	Package 1 Length	12 in / 30.48 cm
Total Unit Weight	108 lbs / 50 Kg		