

## 3000 lbs Powered Electric Winch Waterproof 12V DC

### Key features

- Sturdy 3,000lb rated line pull powered by 1 horsepower 12V DC motor.
- Low-amp, permanent magnet motor; Gear Ratio- 166:1
- Pull and turn free spooling clutch; Gearing 3 Stage Planetary.
- Reliable Drum Brake Designed to Automatically Engage upon any Loss of Power.
- 1 Year Warranty, Customer Support and Service in the USA

### Winch Description

This **3,000 lbs Electric ATV/UTV Winch 12V** will get you out of any sticky situation. Whether you are in the dirt, mud, or snow this dependable winch is the vital partner every rider needs. With an impressive 3,000lb load capacity and 1HP motor, this electric winch will give you the results you need. Use this winch with confidence as it includes a 1 Year Warranty

### Prowinch Electric DC Winches

All of our electric DC winches are created with the goal of offering the best price-performance ratio. Key components such as lifespan factors are constantly tested and improved in order to offer the best product for the price.

### Key Components

All internal components have been upgraded to meet the highest quality standards. Key electronic components are produced by American or German brands, and we use American-made lubricants to ensure the lifespan of gears and reducers. Final assembly and all tests are performed locally at Prowinch facility before shipping to ensure that every unit meets the corresponding standard.

### Control System


This winch includes a 12V wired remote control. The winch contains the best electric components available on the market, and everything is made, assembled, and tested locally in the US, Chile, or Colombia.

### Braking System

Prowinch electric DC winches include a sliding ring gear clutch and an in drum automatic brake. Automatic brake system designed to automatically engage immediately upon any loss of power.

## Technical Specifications


<b>1st Layer Rated Capacity</b>	3000 lbs	<b>Motor AMP</b>	230 AMP
<b>Speed /min</b>	6~23 ft / 1.9~7.1 m	<b>IEC Motor Protection</b>	IP67
<b>Number of Speeds</b>	1 Speed	<b>Control</b>	Wired Remote Control
<b>Wire rope capacity per layer first/last</b>	3,000 / 1,779	<b>Transmission / Reducer Type</b>	3-Stage Planetary
<b>Voltage</b>	Battery Power 12 VDC	<b>Gear Ratio</b>	166:1
<b>FCC ID</b>	2ASYP-DW12K	<b>Drum Brake</b>	In-Drum Automatic Brake
<b>Duty Class</b>	Recovery / Rescate	<b>Free Spooling Clutch Type</b>	Cam Activated
<b>Motor/Engine Type</b>	DC Permanent Magnet Motor	<b>Wire Rope</b>	Steel $\phi 3/16$ in x 50 ft   $\phi 4.8$ mm x 15 m
<b>Motor/Engine Power</b>	1 HP	<b>Warranty</b>	1 Year

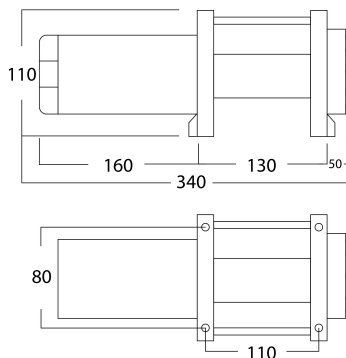

Dimensions in mm / Dimensiones en mm



### INCLUDED/ INCLUIDO

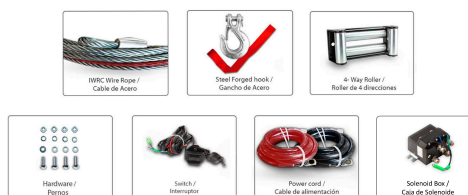

### OPTIONAL / OPCIONAL



## Unit Weight & Dimensions

<b>A Total Height</b>	114 mm	<b>Package 1 Net Weight</b>	17 lbs / 8 Kg
<b>DL Drum Length</b>	74 mm	<b>Package 1 Width</b>	11 in / 27.94 cm
<b>W Width</b>	335 mm	<b>Package 1 Gross Weight</b>	26 lbs / 12 Kg
<b>J Hook Opening</b>	15.5 mm	<b>Package 1 Height</b>	7 in / 17.78 cm
<b>BD Barrel Diameter</b>	50 mm	<b>Package 1 Length</b>	15 in / 38.1 cm
<b>Total Unit Weight</b>	17 lbs / 8 Kg		

## Packaging Weight & Dimensions