

2 Ton Power Trolley 220/460V 60HZ 3 Phase with Limit Switches Pendant not Included


Key features

- 3 Year Warranty, Customer Support and Service in the USA

2 Ton Power Trolley 230/460V 60HZ 3 Phase with Limit Switches Pendant not Included

Technical Specifications

Rated Load Capacity	4400 lb / 2000 kg	I-Beam Width Range	3.22~7 in / 82~178 mm
Voltage	3 Phase 208~240/440~480V 50/60Hz	Minimum Turn Radius	3 ft / 1 m
Total Power Watts	0.4 kW	Standards Compliance	ASME B30.17
Trolley Speed /min	43 ft / 13 m @ 60 HZ 36 ft / 11 @ 50 HZ	Warranty	3 Year

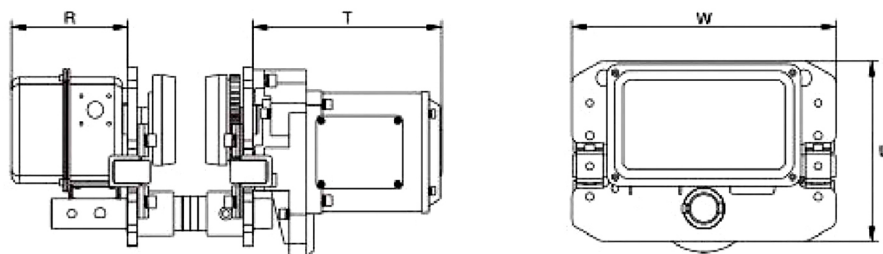

Model / Modelo		PWQE1Ti	PWQE2Ti	PWQE3Ti	PWQE5Ti	PWQE7Ti	PWQE10Ti
Dimensions / Dimensiones	W	12.4 in / 315mm	12.7 / 325mm	13.3in / 340mm	15.7 in / 400mm	26.5 in / 670 mm	19.6in / 500mm
	U	8.3 in / 212mm	8.6mm / 220mm	9.8 in / 250mm	11.4 in / 291mm	-	14.6in / 371mm
	R	5.5 in / 142mm	5.5 in / 142mm	5.5 in / 142mm	5.5 in / 142mm	9 in / 231 mm	5.5 in / 142mm
	T	9 in / 231mm	9 in / 231mm	9 in / 231mm	9 in / 231mm	5.6 in / 142 mm	9 in / 231mm

Unit Weight & Dimensions

T Trolley Motor Width	9.09 in / 231 mm	Package 1 Net Weight	90.2 lbs / 41 Kg
A Total Height	10 in / 250 mm	Package 1 Width	14 in / 35.56 cm
R Trolley Cover Width	6 in / 142 mm	Package 1 Gross Weight	99 lbs / 45 Kg
W Width	13.5 in / 340 mm	Package 1 Height	16 in / 40.64 cm
Total Unit Weight	90.2 lbs / 41 Kg	Package 1 Length	22 in / 55.88 cm

Packaging Weight & Dimensions