



## 550 lb Portable Electric Rope Hoist 60 meters lifting height 240V

### Key features


- High-efficiency Motor 1300W with Wired remote control with Emergency Stop
- Upper and Lower Limit Switches
- Duty Classification H1/M2/1Cm/Class A
- US and EU Standards ASME HST-4, ASME B30.16, IEC60204-32
- 1 Year Warranty, Customer Support and Service in the USA

### Electric Wire Rope Hoist Description

250 kg Wireless Electric Wire Rope Hoists are used for raising and lowering material. Power Cord is standard at 3 ft. for Hook and Push Trolley Mounts. Hoists usually ship within 1-3 business days after ordering. Please call us at 1 (800) 971-8061 for any special requests. The Highest Quality, most Technologically Advanced Hoist in the Industry. Our hoist ranges from basic Light Duty H1 to Heavy Duty Motor - 60 minute, H4 classification, Class B insulation with cooling fins and standard thermal motor protection. Compact lightweight body offers one of the lowest headroom hoists in the industry. Extremely durable and reliable Pull Rotor Motor Brake. Contains NO brake coil to fail like conventional disc brakes. Easy Maintenance Control Panel is hinged to swing out to provide fast, easy, and trouble-free access. Completely Sealed Body suitable for both indoor and outdoor applications, including harsh environments. Gaskets throughout the hoist provide an IP54 rating. Oil Bath and precision machined helical and spur gears provide for quiet, smooth, and cool operations.

## Technical Specifications

<b>Rated Load Capacity</b>	551 lb / 250 kg	<b>Insulation Grade</b>	B
<b>Standard Lifting Height</b>	200 ft / 60 m	<b>IEC Motor Protection</b>	IP54
<b>Speed /min</b>	49 ft / 15 m	<b>Control</b>	Pendant Control and Optional Wireless F21
<b>Number of Speeds</b>	1 Speed	<b>Wire Rope</b>	ø3/16 in   ø4.5 mm
<b>Voltage</b>	3 Phase 220~240V 60Hz	<b>Humidity</b>	<85%
<b>Duty Class</b>	H1/M2/1Cm/Class A	<b>Temperature</b>	-4°~104° F / -20°~40° C
<b>Motor/Engine Type</b>	Squirrel Cage Induction Motor	<b>Noise Level</b>	71 dB
<b>Motor/Engine Power</b>	1300 W	<b>Warranty</b>	1 Year

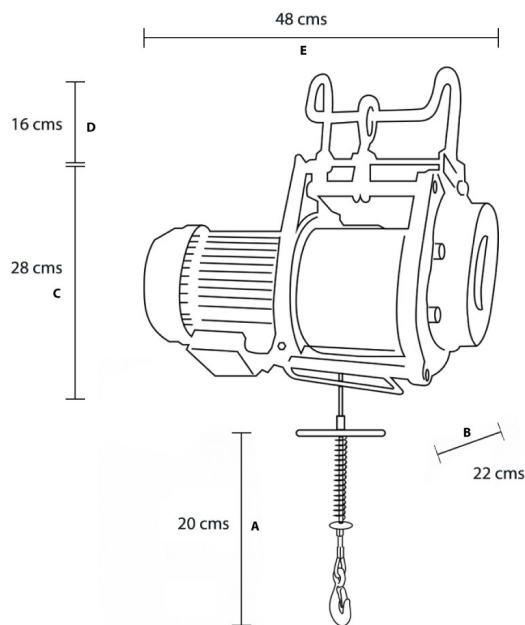

MODEL	PWBH250A
A	20 cm
B	22 cm
C	28 cm
D	16 cm
E	48 cm

## Unit Weight & Dimensions

<b>D Depth</b>	9 in / 230 mm	<b>Package 1 Net Weight</b>	68 lbs / 31 Kg
<b>W Width</b>	19 in / 483 mm	<b>Package 1 Width</b>	12 in / 30.48 cm
<b>Total Unit Weight</b>	68 lbs / 31 Kg	<b>Package 1 Gross Weight</b>	70 lbs / 32 Kg

## Packaging Weight & Dimensions

**Package 1 Height** 15 in / 38.1 cm

**Package 1 Length**

21 in / 53.34 cm