



10 Ton Hydraulic Winch Incorporated Roller 20000 lbs. Light Duty 12V Wired/Wireless Control


Key features

- 3 Year Warranty, Customer Support and Service in the USA

Hydraulic Winch Incorporated Roller 20000 lbs. Heavy Duty 12V Wired/Wireless Control



Technical Specifications

1st Layer Rated Capacity	20000 lb / 9000 Kg	Oil Pressure	1450 psi
Speed /min	14~19 ft / 5~5.7 m	Oil Flow	8 Gal/min - 30L/min
Number of Speeds	1 Speed - Optional Variable Speed	Transmission / Reducer Type	2 Stages Planetary / 2 Etapas Planetario
Wire rope capacity per layer first/last	20,000 / 8,000 lbs	Gear Ratio	33:1
FCC ID	WTX20X04015023E	Drum Brake	YES
Duty Class	H1/M2/1Cm/Class A	Free Spooling Clutch Type	Manual
Motor/Engine Type	Hydraulic w/ Counterbalance valve	Wire Rope	ø1/2 in x 78 ft ø13 mm x 24 m
Motor Brake	In Drum Brake	Recommended Wire Rope	REMOVE FIELD
IEC Motor Protection	IP67	Standards Compliance	SAE-J706
Control	Wireless w/ 12 V Electro Valve Block	Warranty	3 Year

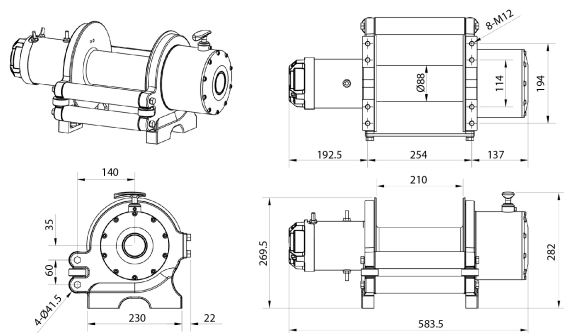

Dimensions in mm / Dimensiones en mm

INCLUDED / INCLUIDO

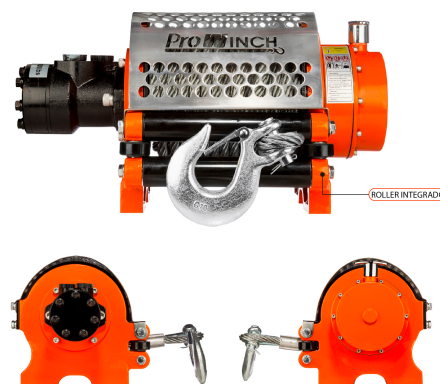

Unit Weight & Dimensions

A Total Height	223 mm	Package 1 Net Weight	190 lbs / 86 Kg
W Width	540 mm	Package 1 Width	18 in / 45.72 cm
D Depth	196 mm	Package 1 Gross Weight	178 lbs / 81 Kg
DL Drum Length	220 mm	Package 1 Height	19 in / 48.26 cm
Total Unit Weight	190 lbs / 87 Kg	Package 1 Length	27 in / 68.58 cm

Packaging Weight & Dimensions